

BIOETHANOL PRODUCTION FROM BATCH AND CONTINUOUS PHYTOREMEDIATION SYSTEMS

MOHD ARIF HAKIMI BIN MAT HASSAN

A thesis submitted in fulfilment of the
requirements for the award the degree of
Master of Engineering (Environment)

Faculty of Civil Engineering
Universiti Teknologi Malaysia

AUGUST 2016

Dedicated to my parents,

MAT HASSAN OTHMAN & SUHANA ABDULLAH

ACKNOWLEDGEMENTS

“In the Name of Allah, the Most Gracious and Merciful”

Praise to Allah, where my greatest gratitude shall recumbent to Him. I would like to express my full hearted appreciation to my dearest supervisor, Assoc. Prof. Dr. Khalida Muda for her encouragement, patience, guidance and inspiration given to me. She never failed to keep my eye straight on the bottom line. Without her, my thesis would have not been completed successfully.

I wish to extend my gratitude to each and every person of whom, from the first day of my research, they continuously assist, support, advices and motivate me. They are my co-supervisors; Dr Aznah Nor Anuar and En. Mohd Nor Othman. Not to forget, other lecturers such as Dr Johan, Dr Fadhil, Dr Azmi, Dr Ali, Dr Edy, Dr Arifah (Faculty of Science) and Dr Haslenda (Faculty of Chemical Engineering) for the guidance. Credits also have to be given to my research partner, Ms. Siti Hanna Elias for her diligent help in assisting my research.

There are so many persons who had helped me since the first day until the end of my research. For those whom name are not mentioned, only God could pay for your kindness. Finally, I hope that this study will give beneficial knowledge for Phytoremediation Technology field of study, especially in conducting future research and development in wastewater treatment.

ABSTRACT

The effectiveness of water hyacinth (*Eichhornia crassipes*) in remediating municipal wastewater and producing bioethanol in batch and continuous systems was compared with water lettuce (*Pistia stratiotes*) and water spinach (*Ipomoea aquatica*). Batch experiment was conducted using stagnant wastewater system and compared with continuous experiment in order to determine the best treatment system for nutrients and pollutants removal while producing high amount of biomass for bioethanol production. The batch experiment was conducted for 7 days while continuous experiment was conducted for 18 days for each of the aquatic plant. The results for the comparison between rhizofiltration plants have shown that water lettuce has better removal performance compared with water hyacinth and water spinach. The continuous system showed better performance in treatment rate and biomass production compared to batch system. The biomass harvested from water hyacinth, water lettuce and water spinach were 772 ± 37 g/kg, 794 ± 75 g/kg and 702 ± 69 g/kg, respectively. Dinitrosalicylic test was conducted to measure the reduction of sugar from plant biomass. The concentration of sugar produced by water hyacinth was 21.2 ± 2.7 g/L, while water lettuce was 23.5 ± 3.8 g/L, which was slightly higher than water hyacinth's sugar production. Water spinach produced the lowest sugar concentration with only 15.5 ± 3.3 g/L. The production of bioethanol estimated from water lettuce was 0.13 ± 0.01 g/g bioethanol. Meanwhile, water hyacinth produced 0.12 ± 0.01 g/g of bioethanol, a value lower than water lettuce. Due to the low concentration of sugar, water spinach managed to produce only 0.10 ± 0.02 g/g bioethanol. In conclusion, water lettuce shows better performance compared with water hyacinth in remediating wastewater and producing biofuel.

ABSTRAK

Keberkesanan remediasi kumbahan domestik dan penghasilan bioethanol dalam system takungan dan sistem aliran berterusan telah dibandingkan diantara keladi bunting (*Eichhornia crassipes*), kiambang air (*Pistia stratiotes*) dan kangkung air (*Ipomoea aquatica*). Kajian sistem bertakung telah dijalankan dengan air sisa statik dan dibandingkan dengan sistem air mengalir untuk menentukan sistem yang terbaik dalam merawat nutrien dan bahan tercemar dan pada masa sama menghasilkan biojisim untuk pengeluaran bioetanol. Kajian air bertakung dijalankan selama 7 hari manakala kajian air mengalir pula dijalankan selama 18 hari bagi setiap jenis tumbuhan akuatik. Keputusan perbandingan sesama tumbuhan penapis *rhizo* menunjukkan kiambang air mempunyai tahap keberkesanan yang lebih baik berbanding keladi bunting dan kangkung air. Kajian terhadap sistem aliran berterusan pula memberikan keputusan yang baik dalam kadar rawatan dan penghasilan biojisim berbanding sistem takungan. Nilai biojisim yang dituai daripada keladi bunting, kiambang air dan kangkung air adalah masing-masing 772 ± 37 g/kg, 794 ± 75 g/kg dan 702 ± 69 g/kg. Ujian dinitrosalisilik telah dijalankan bagi mengukur penurunan gula daripada biojisim tumbuhan. Kepekatan gula yang terhasil daripada keladi bunting adalah 21.2 ± 2.7 g/L, manakala kiambang air pula menghasilkan 23.5 ± 3.8 g/L gula, suatu nilai yang lebih tinggi berbanding penghasilan keladi bunting. Kangkung air pula menghasilkan kepekatan gula yang terendah dengan kepekatan hanya 15.5 ± 3.3 g/L gula terekstrak. Penghasilan bioetanol daripada kepekatan gula dapat dianggarkan yang mana kiambang air menghasilkan 0.13 ± 0.01 g/g bioetanol manakala keladi bunting pula menghasilkan 0.12 ± 0.01 g/g bioetanol. Kerana kandungan gula yang rendah, kangkung air hanya berjaya menghasilkan 0.10 ± 0.02 g/g bioetanol. Kesimpulannya, kiambang air menunjukkan kebolehan yang lebih baik berbanding keladi bunting dan kangkung air dalam merawat air kumbahan domestik dan menghasilkan bioetanol.

TABLE OF CONTENT

CHAPTER	TITLE	PAGE
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENT	iv
	ABSTRAK	v
	ABSTRACT	vi
	CONTENT	vii
	LIST OF TABLES	xi
	LIST OF FIGURES	xiii
	LIST OF APPENDICES	xv
1	INTRODUCTION	
	1.1 Preamble	1
	1.2 Objectives of the study	3
	1.3 Scope of the Study	3
	1.4 Significance of the Study	4
2	LITERATURE REVIEW	
	2.1 Introduction	5
	2.2 Types of Phytoremediation	7
	2.3 Performance of Phytoremediation	9
	2.4 Application of Phytoremediation	13
	2.4.1 Phytoremediation of Wastewater	15
	2.4.2 Phytoremediation Treatment Plant	19

2.4.3	Rhizofiltration for Municipal Wastewater Treatment	24
2.5	Growth and Survival Factor of Aquatics Plants	28
2.6	Designing Phytoremediation Wastewater Treatment Plant	31
2.6.1	Hydraulic Retention Time	31
2.6.2	Organic Loading Rate	32
2.6.3	Hydraulic Loading Rate	33
2.6.4	Doubling Time	34
2.8	Phytoremediation Byproduct: Biofuel	35
2.8.2	Biomass Pretreatment	37
2.8.2.1	Physical Pretreatment	38
2.8.2.2	Physicochemical Pretreatment	38
2.8.2.3	Chemical Pretreatment	39
2.8.2.4	Biological Pretreatment	41
2.8.2.5	Pulsed-Electric-Field Pretreatment	41
2.8.3	Biomass Treatment Method	42
2.9	Correlation of Sugar and Bioethanol	50

3 METHODOLOGY

3.1	Introduction	53
3.2	Materials	55
3.2.1	Aquatic Plants	55
3.2.2	Wastewater	55
3.2.3	Experimental Setup	56
3.2.3.1	Batch Experimental Setup	56
3.2.3.2	Continuous Experimental Setup	56
3.2.3.3	Reagents	60
3.3	Analytical Method	60
3.3.1	Chemical Oxygen Demand	61
3.3.2	Nitrogen	61
3.3.3	Phosphorus	62
3.3.4	Other Water Quality Analysis	62
3.4	Experimental Procedure	63

3.4.1	Batch System Experimental Procedure	63
3.4.2	Continuous Experimental Procedure	64
3.4.3	Waiving the Plant Sample	65
3.4.4	Dinitrosalicylic (DNS) Test	66
3.4.4.1	DNS Standard Curve	66
3.4.4.2	DNS for Biomass of Rhizofiltration Plants	67

4 RESULTS AND DISCUSSION

4.1	Removal Efficiency of Rhizofiltration Plants in Batch Experiment	68
4.1.1	Nitrogen Removal Performance in Batch Experiment	69
4.1.2	Phosphorus Removal Performance in Batch Experiment	70
4.1.3	BOD ₅ Removal Performance in Batch Experiment	71
4.1.4	COD Removal Performance in Batch Experiment	72
4.1.5	Plant Density and Growth Rate of Rhizofiltration Plants in Batch Experiment	73
4.2	Removal Efficiency of Rhizofiltration Plants in Continuous Experiment	75
4.2.1	Nitrogen Removal Performance in Continuous Experiment	75
4.2.2	Phosphorus Removal Performance in Continuous Experiment	78
4.2.3	COD and BOD Removal Performance in Continuous Experiment	80
4.2.4	Other Removal Performance in Continuous Experiment	82
4.3	Comparison between Batch and Continuous Experiment	84
4.4	Phytoremediation Byproduct: Biomass	85
4.4	Sugar Production by the Rhizofiltration Plants	87

4.5	Bioethanol Production by the Rhizofiltration Plants	89
-----	-----------------------------------------------------	----

5 CONCLUSIONS AND RECOMMENDATIONS

6.1	Conclusions	93
-----	-------------	----

6.2	Recommendations	94
-----	-----------------	----

References	96-110
-------------------	--------

Appendices A - D	101-114
-------------------------	---------

LIST OF TABLES

TABLE NO.	TITLE	PAGE
2.1	Summary on the types of phytoremediation	7
2.2	Illustration of the physiological process of phytoremediation	8
2.3	Summary on the phytoremediation of heavy metals	10
2.4	Summary on the phytoremediation of organic nutrient	11
2.5	The objectives of using phytoremediation in wastewater treatment (EPA, 2000)	16
2.6	Elements essential for growth of aquatic plants (Chongrak <i>et al.</i> , 1996)	30
2.7	Summary Comparison Between Sugar and Bioethanol Production	70
3.1	The reagents used in this study	60
3.2	Water quality analysis	62
4.1	The batch test's influent characteristics	68
4.2	Plants' length and weight in a cycle of average doubling time of the plant	74
4.3	ANOVA analysis for phosphorus removal performance by rhizofiltration plants in continuous experiment	79
4.4	Other parameters removal performance in continuous Experiment	83
4.5	Comparison between batch and continuous systems	84
4.6	Biomass from the rhizofiltration plants in continuous experiment	86
4.7	Sugar concentration obtained from the biomass of rhizofiltration plants	88

4.8	Bioethanol estimated from sugar concentration using Holzberg equation (Holzberg <i>et al.</i> , 1967)	90
4.9	ANOVA analysis of bioethanol production from water spinach compared with water hyacinth	92

LIST OF FIGURE

FIGURE NO.	TITLE	PAGE
2.1	Conceptual steps of changing conventional treatment to aquatic processing units (APU)	21
2.2	Illustration of a phytoremediation treatment plant	23
2.3	Pictures of aquatic plants species	26
2.4	Simple flowcharts of biofuel production	36
2.5	Production of biofuel from water hyacinth using hydrolysis and fermentation	43
2.6	Production of biofuel from plant biomass using gasification and high pressure	45
2.7	Treatment process using acid/alkali hydrolysis and simultaneous saccharification and fermentation mode	46
2.8	Treatment process using acid/alkali hydrolysis and separate saccharification and fermentation mode	47
3.1	Flow chart of Research	54
3.2	(a) The physical condition of the experimental area and (b) the transparent rooftop to allow sunlight to reach the experimental area	57
3.3	Four (4) hydroponic were used in the batch study	58
3.4	Lab-Scale Continuous Rhizofiltration Rig System (Lab-Scale CRRS)	58
3.5	Illustration of Lab-Scale Continuous Rhizofiltration Rig System	59
3.6	The condition of influent poured inside the influent compartment of the rig (a) and the condition of effluent after 18 days (b)	64

4.1	Nitrogen removal performances in batch experiment	69
4.2	Phosphorus removal performances in batch experiment	70
4.3	BOD ₅ removal performances in batch experiment	71
4.4	COD removal performance in batch experiment	73
4.5	The initial size of water hyacinth (a) and the size of water hyacinth after the experiment (b)	74
4.6	Nitrogen removal performance in continuous experiment	76
4.7	The comparison of water spinach's length and root size (in red circle) before (a) and after (b) the continuous experiment	77
4.8	Phosphorus removal performance by the rhizofiltration plants in continuous experiment	79
4.9	COD removal performance in continuous experiment	80
4.10	BOD ₅ removal performance in continuous experiment	81
4.11	The chopped (a) and grinded (b) dried aquatic plant's biomass stored in a closed glass laboratory bottle	86
4.12	DNS Standard Curve	87
4.13	Scattered graph of biomass versus bioethanol with respect to rhizofiltration plants	92

LIST OF APPENDICES

NO.	TITLE	PAGE
A	Domestic Wastewater Treatment Flow	96
B	Untreated Domestic Wastewater Influent	97
C	Parameter Limits of Effluent	98
D	Designing Phytoremediation Experimental Rig	99

CHAPTER 1

INTRODUCTION

1.1 Preamble

Excessive nutrient contamination has always been a threat to the environment. The sources of excessive nutrient usually comes from domestic and agriculture wastewater. Both domestic and agriculture wastewaters are normally treated in conventional wastewater treatment plant before it can be discharged to open waters. As human population increased, wastewater treatment plants are unable to provide proper treatment to wastewater. As a result, the effluent from wastewater treatment plant still contains significant amount of nutrient. The excessive nutrient creates unsustainable disorder upon water cycle and unstable condition to animal habitats as well as human consumption of clean water.

The increasing number of human population will also increase organic loading of municipal wastewater. Higher population creates higher concentration of nutrients. This will affect the efficiency of a conventional wastewater treatment. Due to the unproductive treatment, effluent produced from the treatment plant will still contain high content of organic loading. The high organic loading effluent shall contribute to a low water quality of the river. Therefore, the municipal treatment

plants may need additional support in order to cater for excessive nutrient contaminant.

There are several options of additional support or to replace the incompetent conventional treatment plant such as activated sludge, aerobic granulation, sequencing batch reactor, membrane reactor and phytoremediation. While most of the treatments were considered as advance treatments, the cost in operating the treatments were significantly expensive compared with phytoremediation (Malik, 2007). Phytoremediation is known as a treatment of using plant as a wastewater remediation system. Current researches have improved the efficiency of treating nutrient using specific type of plants making the environmental approach of phytoremediation reliable for municipal wastewater treatment. Therefore, treating municipal wastewater with plant which previously considered as traditional approach might be one of the promising options in creating a larger treatment prospect (Abbasi and Ramasami, 1999; Narayana and Parveen, 2000).

Other than treating excessive nutrient, these phytoremediation plants have also been identified as a good biogas producer. Intensive attention was made on the potentials and constraint of water hyacinth usage for biofuel production (Singhal and Rai, 2002). The production of biofuel in replacement of fossil fuel production had caused severe conflicts of interest with environmentalists and food industries. The real problem is conversion of farmland for food to biofuel industries. For instant, in the US, up to 2004, 30% of its corn farmland that is used for producing foods was converted to serve biofuel industries, resulting in price hikes to the food industries (Chartchalerm *et al.*, 2007). Not many studies have been conducted to compare the phytoremediation performance between water lettuce, water spinach and water hyacinth. This study aims to explore more on water lettuce and water spinach and compare its biofuel production with water hyacinth.

1.2 Objectives of the Study

This study embarks on the following objectives:

- 1) To determine nutrients removal by selected rhizofiltration plants.
- 2) To determine the differences of micro nutrients and pollutant removal performance between stagnant batch and continuous flow system.
- 3) To estimate the production of biofuel from rhizofiltration plants used in wastewater treatment process using designated experimental rig.

1.3 Scope of the Study

The experiment was conducted in a batch and continuous system. The phytoremediation plants selected were water hyacinth, water lettuce and water spanich. The nutrient removal performance were analyzed by measuring water quality in terms of BOD, COD, nitrogen and phosphorus. The growth of the plants were also being monitored by measuring its doubling time, i.e. time required for the plants to double its length and weight.

The final stage of this study includes estimation of bioethanol production from the phytoremediation plants. The phytoremediation plants are converted to biomass by conducting a pretreatment process used in converting plants to bioethanol. The bioethanol is estimated via extraction of sugar content that is produced from the biomass of the phytoremediation plants. The sugar content is produced and estimated using dinitrosalicyclic (DNS) test.

1.4 Significance of the Study

The significance of this study is contributed by comparison of removal performance for three types of phytoremediation plants i.e. water hyacinth, water lettuce and water spinach. The study also quantifies and compares the production potential of sugar content as a source of biofuel production by these phytoremediation plants. The findings of this study would be beneficial for future investigation in exploring the potential production of biofuel harvested from phytoremediation wastewater treatment system.

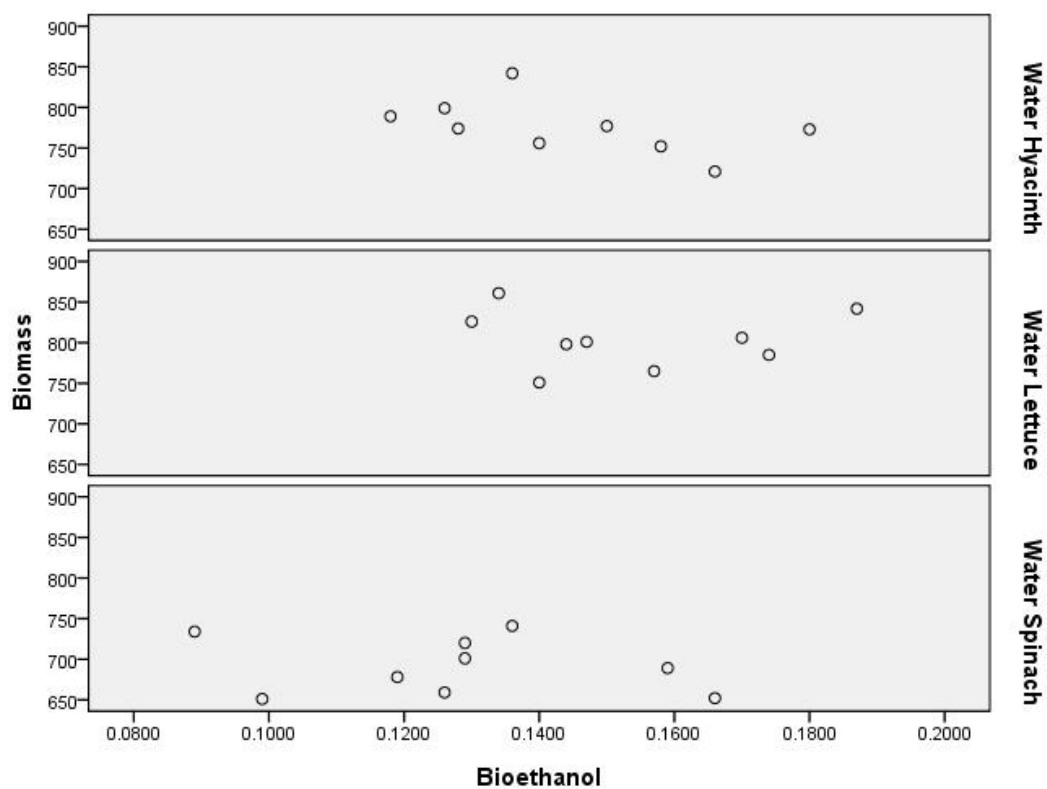


Figure 4.13 Scattered plot of biomass versus bioethanol graph with respect to rhizofiltration plants

Table 4.9: ANOVA analysis of bioethanol production from water spinach compared with water hyacinth

Water Spinach	Sum of Squares	df	Mean Square	F	Significant
Between Groups	0.001	1	0.001	4.076	0.061
Within Groups	0.005	16	0.000		
Total	0.006	17			

REFERENCES

- Abbasi, S.A. and Ramasami, E., (1999). Biotechnological Methods of Pollution Control. University Press Ltd., Hyderguda, Hyderabad. Page 8–51.
- Abou-Shanab, R.I., Delorme, T.A., Angle, J.S., Chaney, R.L., Ghanem, K., Moawad, H. and Ghazlan, H.A. (2003). Phenotypic characterization of microbes in the rhizosphere of *Alyssum murale*. *Int. J. Phytorem.*, 5: 367-379.
- Abraham, M. and Kurup, G.M. (1996). Bioconversion of tapioca (*Manihot esculenta*) waste and water hyacinth (*Eichhornia crassipes*) – Influence of various physic-chemical factors. *J. Ferment. Bioeng.* 82(2): 259-263.
- Aiba, S., Shoda, M. and Nagatani, M. (1968). Kinetics of product inhibition in alcoholic fermentation. *Biotechnol. Bioeng.*, 10:845-864.
- Alexander, M. (1999). Biodegradation and Bioremediation, 2nd Edition. Academic Press: New York, NY.
- APHA. (1992). Standard Methods for the Examination of Water and Wastewater. 18th Edition. American Public Health Association, Washington, D.C.
- Aswathy, U.S., Sukumaran, R.K., Devi, G.L., Rajasree, K.P., Singhanian, R.R. and Pandey, A. (2009). Bio-ethanol from water hyacinth biomass: An evaluation of enzymatic Saccharification strategy. *Bioresource Technology*. 101(3), 925–930.
- Baker, A.J.M., McGrath, S.P. and Reeves, R.D. (2000). Metal Hyperaccumulator Plants: A Review of the Ecology and Physiology of a Biological Resource for Phytoremediation of Metal-Polluted Soils. In: Terry, N. and Banuelos, G. *Phytoremediation of Contaminated Soil and Water*. Boca Raton: Lewis Publishers. Page 85–108.
- Blaylock, M.J., Salt, D., Dushenkov, S., Zakharova, O., Gussman, C., Kapulnik, Y., Ensley, B.D. and Raskin, I. (1995). Enhanced accumulation of Pb in Indian mustard by soil-applied chelating agents. *Environ Sci Technol.* 31: 860-865.

- Burd, G.I., Dixon, D.G. and Glick, B.R. (2000). Plant growth-promoting bacteria that decrease heavy metal toxicity in plants. *Biotechnology*. 46:237-245.
- Bravin, M.N., Tentscher, P., Rose, J. and Hinsinger, P. (2009). Rhizosphere pH gradient controls copper availability in a strongly acidic soil. *Environ. Sci. Technol.* 43: 5686-5691.
- Brooks, R. R., Lee, J., Reeves, R.D. and Jaffrè, T. (1977). Detection of nickeliferous rocks by analysis of herbarium specimens of indicator plants. *J. Geochem. Explor.* 7, 49–57.
- Birney, E.C., Grant, W.E. and Baird, D.D. (1976). Importance of Vegetative Cover to Cycles of Microtus Populations. *Ecology*. 57:1043–1051.
- Borovi ka, J., anda, Z., Jelínek, E., Kotrba, P. and Dunn, C.E. (2007). Hyperaccumulation of silver by *Amanita strobiliformis* and related species of the section *Lepidella*. *Mycological Research*. 111: 1339–44.
- Blaylock, M.J., Elless, M.P., Huang, J.W. and Dushenkov, S.M. (1999). Phytoremediation of Lead-Contaminated Soil at a New Jersey Brownfield Site. *Remediation*. 99; 93-101
- Brent, W., Durkalec, A. and S. Ashley. (2008). *Inuvialuit Settlement Region Impact Analysis*. Canadian Council of Ministers of the Environment, Draft - Canada Wide Strategy for the Management of Municipal Wastewater Effluent. Inuit Tapiriit Kanatami. Page 60.
- Brooks, R.R. and Robinson, B.H. (1998). *Aquatic phytoremediation by accumulator plants*. In: *Plants that Hyperaccumulate Heavy Metals: Their Role in Phytoremediation, Microbiology, Archaeology, Mineral Exploration and Phytomining*. CAB International, Oxon,UK. Page 203-226.
- Cameron, K.C. and Colleen, H.J. (2008). *Nutrient and pesticide transfer from agricultural soils to water in New Zealand*. In: Haygarth, P.M. and Jarvis, S.C. *Agriculture, hydrology and water quality*. Wallingford, UK. CAB International. Page 373-394.
- Calderon, I.M. (2010). Potential Applications of the Vetiver System in the Lake Amatitlan Watershed, Guatemala. *Undergraduate thesis*, Cornell University.
- Cunningham, S.D., Cecava, M.J. and Johnson, T.R. (1993). Nutrient digestion, nitrogen, and amino acid flows in lactating cows fed soybean hulls in place of forage or concentrate. *J. Dairy Sci.* 76: 3523-3535

- Cunningham S.D, Berti, W.R. and Huang, J.W. (1996). Gln3p is capable of binding to UAS(NTR) elements and activating transcription in *Saccharomyces cerevisiae*. *J. Bacteriol.* 178(12):3470-9.
- Cunningham, S.D., Berti, W.R. and Huang, J.W. (1995). *Remediation of Contaminated Soils and Sludges by Green Plants. In: Bioremediation of Inorganics*. Columbus, OH. Battelle Press.
- Chartchalerm, I.N., Tantimongcolwat, T., Kongpanpee, T., Prabkate, P. and Prachayasittikul., V. (2007). *Eichhornia crassipes* to Liquid Ethanol: Future Prospects for Community. *Bioresource Technology*. 6:167-176 – ISSN 1611-2156.
- Chen, X., Chen, X.X., Wan, X.W., Weng, B.Q. and Huang, Q. (2010). Water Hyacinth (*Eichhornia crassipes*) Waste as Adsorbent for Phosphorus Removal from Swine Wastewater. *Bioresource Technology*. 101: 9025-9030.
- Chen, H.M., Zheng, C.R., Tu, C. and Shen, Z.G. (2000). Chemical methods and phytoremediation of soil contaminated with heavy metals. *Chemosphere*. 41: 229–234.
- Chongrak, P. (1996). *Organic Waste Cycling Technology Management*. Second edition. John Wiley and Son. Page 268-300.
- Crites, R. and Tchobanoglous, G. (1998). *Small and Decentralized Wastewater Management Systems*. Boston: McGraw-Hill Co., Inc.
- Cornwell, D.A., Zoltek, J., Patrinely, C.D., Furman. T.D.S. and Kim, J.I. (1977). Nutrient removal by water hyacinths. *J. Water Pollut. Control Fed.* 49: 59-61.
- Chukwuka, K.S. and Uka, U.N. (2007). Effect of Water Hyacinth (*Eichhornia crassipes*) Infestation on Zooplankton Populations in Awba Reservoir, Ibadan South-West Nigeria. *J. Biol. Sci.* 7: 865-869.
- Coats, J.R. and Anderson, T.A. (1997). The use of vegetation to enhance bioremediation of surface soils contaminated with pesticide wastes. US EPA, Office of Research and Development, Washington, DC., USA.
- Dar, S.H., Kumawat, D.M., Singh, N. and Wani, K.A. (2011). Sewage Treatment Potential of Water Hyacinth (*Eichhornia crassipes*). *Research Journal of Environmental Sciences*. 5: 377-385.

- Davis, L.A. (2005). Handbook of Constructed Wetlands. USDA-NRCS and EPA, Washington DC., USA.
- Dell'Amico, E., Cavalca, L. and Andreoni, V. (2005). Analysis of rhizobacterial communities in perennial Graminaceae from polluted water meadow soil and screening of metal-resistant, potentially plant growth-promoting bacteria. *FEMS Microbiol. Ecol.* 52:153-162.
- DeSchrijver, A. and DeMot, R. (1999). Critical Reviews in Degradation of Pesticides by Actinomycetes. *Microbiology*. 25: 85-119.
- Dien, B.S., Cotta, M.A. and Jeffries, T.W. (2003). Bacteria engineered for fuel ethanol production: current status. *Appl Microbiol Biotechnol.* 63(3):258-66.
- Dutta Gupta, S., Yasuomi, I., Marcel, H. and Jozef, A. (2007). Plant tissue culture engineering. *Biotechnology*. Dordrecht, netherland, Springer. Page 145-150.
- Eberhardt, T.L. and Min, S.H. (2008). Biosorbents prepared from wood particles treated with anionic polymer and iron salt: Effect of particle size on phosphate adsorption. *Bioresource Technology*. 99, 626–630.
- Eggeman, T. and Elander, R.T. (2005), Process and economic analysis of pretreatment technologies. *Bioresource Technology*. 96 (18): 2019–2025.
- El-Shinnawi, M.M., Alaa El-Din, M.N., El-Shimi, S.A. and Badawi, M.A. (1989). Biogas production from crop residues and aquatic weeds. *Res Conser Recyc.* 3:33-45.
- Environmental Protection Association (EPA). (2000). Treatment Technologies for Site Cleanup: Annual Status Report. 9th Edn., Office of Solid Waste and Emergency Response-TIO, EPA, Washington, DC., USA.
- Faisal, M. and Hasnain, S. (2005). Chromate resistant *Bacillus cereus* augments sunflower growth by reducing toxicity of Cr(VI). *J. Plant Biol.*, 48:187-194.
- Flathman, P.E. and Lanza, G.R. (1998). Phytoremediation: current views on an emerging green technology. *Journal of Soil Contamination*. 7(4):415-432.
- Frazar, C. (2000). *The Bioremediation and Phytoremediation of Pesticide-contaminated Sites*. U.S. Environmental Protection Agency, Solid Waste and Emergency Response.

- Ganguly, A., Chatterjee, P.K. and Dey, A. (2012). Studies on ethanol production from water hyacinth - A review. *Renewable and Sustainable Energy Reviews*. 16: 966-972.
- Gao, J., Garrison, A.W., Mazur, C., Wolfe, N.L. and Hoehamer, C. (1999). Phytoremediation of Organophosphorous (OP) Compounds using Axenic Plant. *J. Plant Biol.* 48:187-194.
- Gettys, A.H., William, T.B. and Marc. (2009). *Biology And Control Of Aquatic Plants: A Best Management Practices Handbook*. Aquatic Ecosystem Restoration Foundation, Marietta, Georgia. ISBN 978-0-615-32646-7. Page 200.
- Grandlic, C.J., Mendez, M.O., Chorover, J., Machado, B. and Maier, R.M. (2008). Plant growth-promoting bacteria for phytostabilization of mine tailings. *Environ. Sci. Technol.* 42: 2079-2084.
- Gray, N.C.C., Cline, P.R., Moser, G.P., Moser, L.E., Guiler, H.A., Gray, A.L. and Gannon. D.J. (1999). Full- Scale Bioremediation of Chlorinated Pesticides. Bioremediation of Nitroaromatic and Haloaromatic Compounds, Alleman, B.C. and A. Leeson (Eds.). *Battelle Press*, Columbus, USA.
- Gupta, A.K., Dwivedi, S., Sinha, S., Tripathi, R.D., Rai, U.N. and Singh, S.N. (2007). Metal accumulation and growth performance of *Phaseolus vulgaris* grown in fly ash amended soil. *Bioresour Technol.* 98: 3404–3407.
- Hannah, L. 1986. An Assessment of Native Wildlife Values for Geothermal Energy Siting in Hawaii. *Environmental Professional*. 8 (1):21.
- Hu, Q., Sommerfeld, M., Jarvis, E., Ghirardi, M., Posewitz, M., Seibert, M. and Darzins, A. (2008). Microalgal triacylglycerols as feedstocks for biofuel production: perspectives and advances. *The Plant Journal*. **54(4)**:621–639.
- Huang, J.W. and Cunningham, S.D. (1997). Lead phytoextraction: Species variation in lead uptake and translocation. *New Phytol.* 134:75-84.
- Hussein, H.S. (2008). Optimization of Plant-Bacteria Complex for Phytoremediation of Contaminated Soils. *Inter. J. Bot.* 4: 437-443.
- Hussein, H.S., Ruiz, O.N., Terry, N. and Daniell, H. (2007). Phytoremediation of mercury and organomercurials in chloroplast transgenic plants: Enhanced root uptake, translocation to shoots and volatilization. *Environ. Sci. Technol.*, 41: 8439-8446.

- Holzberg, I., Finn, R.K. and Steinkraus, K.H. (1967). Kinetic study of the alcoholic fermentation of grape juice. *Biotechnol. Bioeng.* 9, 413-423.
- Howard, C., W. (1985). Cycling and retention of nitrogen and phosphorus in wetlands: a theoretical and applied perspective. *Freshwater Biology.* 15 (4), 391-431.
- Itoh, H., Wada, M., Honda, Y., Kuwahara, M. and Watanabe, T. (2003). Bioorganosolve pretreatments for simultaneous saccharification and fermentation of beech wood by ethanolysis and white rot fungi. *J. Biotechnol.* 103, 273–280.
- James, C. L. (1985). *Water Quality and Its Control*. University of North Carolina, John Wiley & Sons. Page 227.
- Khan, S. and Sarwar, K.S. (2002). Effect of Water-hyacinth Compost on Physical, Physico-chemical Properties of Soil and on Rice Yield. *Journal of Agronomy.* 1: 64-65
- Kumar, A., Singh, L.K. and Ghosh. S. (2009). Bioconversion of lignocellulosic fraction of water-hyacinth (*Eichhornia crassipes*) hemicellulose acid hydrolysate to ethanol by *Pichia stipites*. *Bioresource Technology.* 100:3293-3297.
- Larcher, W. (1995). *Physiological Plant Ecology*. Springer-Verlag, Heidelberg, Berlin. ISBN 3-540-58116-2. Page 506.
- Lesikar, B., Weaver, R., Richter, A. and O'Neill, C. (2005). *Constructed Wetland*. Texas Agricultural Extension Service.
- Li, T., Z. Di, E. Islam, H. Jiang, and X. Yang. 2009. Rhizosphere characteristics of zinc hyperaccumulator *Sedum alfredii* involved in zinc accumulation. *Journal of Hazardous Materials* 185: 818-823.
- Macek, T., Mackova, M. and Kas, J. (2000). Exploitation of plants for the removal of organics in environmental remediation. *Biotechnol. Adv.* 18: 23-34.
- Malik, A. (2007). Environmental challenge vis a vis opportunity: the case of water hyacinth. *Environ Int.* 2007;33:122-38
- Mander, U. and Jenssen, P. (2002). *Constructed Wetlands for Wastewater Treatment in Cold Climates*. Norway, WITPress. Vol 11, Page 11-333.
- Maria, C. (2011). *Potential Applications of the Vetiver System in the Lake Amatitlan Watershed, Guatemala*. Cornell University, US.
-

- Mark, P.S., Dara, C., Zhao, M., Zayed, A.M., Steven, E. R., Denise S. and Norman, T. (1999). Rhizosphere Bacteria Enhance (Selenium) Accumulation and Volatilization by Indian mustard. *Plant Physiol.* 119 (2): 565–574.
- Maier, R.M., Neilson, J.W., Artiola, J.F., Jordan, F.L., Glenn, E.P. and Descher, S.M. (2001). Remediation of metal-contaminated soil and sludge using biosurfactant technology. *Int J Occup Med Environ Health.* 14:241–248.
- Masami, G.O., Usui, I. and Urano, N. (2008). Ethanol production from the water hyacinth *Eichhornia crassipes* by yeast isolated from various hydrospheres. *African J Microbio Res.* 2:110-113.
- Matt, A.L., Balouet, J.C., Karg, F., Vroblesky, D.A. and Burken, J.G. (2011). Phytoscreening for chlorinated solvents using rapid in vitro SPME sampling: Application to urban plume in Verl, Germany. *Environ. Sci. Tech.* 45 (19), 8276-8282.
- Metcalf and Eddy.(2003). *Wastewater engineering: Treatment and reuse.* Boston: McGraw-Hill.
- Mohr, H. and Schopfer, P. (1995). Plant Physiology. *Biologia Plantarum.* 38(3):458.
- Morikawa H, Takahashi M, Kawamura Y. (2003). *Metabolism and genetics of atmospheric nitrogen dioxide control using pollutant-philic plants.* In: McCutcheon, S.C. and Schnoor, J.L. *Phytoremediation.* Hoboken, New Jersey, USA. John Wiley. Page 765–786.
- Michael, H.H. (2001), Hausmann, T.S and Fortman, T.J. (2001). *Assessment of mass-transfer limitations during slurry bioremediation of PAHs and alkanes in aged soils.* In: *Bioremediation Of Energetics, Phenolics, And Polycyclic Aromatic Hydrocarbons: the Sixth International In Situ and On-Site Bioremediation Symposium.* San Diego, California. Battelle Press, Columbus, OH. 3:157-163.
- Mbuligwe, S.E. (2005). Applicability of a septic tank/engineered wetland coupled system in the treatment and recycling of wastewater from a small community. *Environ. Manage.* 35: 99-108.

- Mbuligwe, S.E. (2008). Optimization of treatment of chlorinated volatile organic compound mixtures in constructed wetlands: Vegetation and substrate effects. Ph.D. Thesis, Louisiana State University, Baton Rouge.
- McCutcheon, S.C. and Rock, S.A. (2000). Phytoremediation: State of the science conference and other developments. *Int. J. Phytoremed.*, 3: 1-11.
- McCutcheon, S.C., Rivera, R., Medina, V.F. and Larson, S.L. (1998). Phytotreatment of TNT-contaminated groundwater. *Journal of Soil Contamination*. 7 (4): 511-529.
- McCutcheon, S.C. and Schnoor, J.L. (2003). *Phytoremediation: Transformation and Control of Contaminants*. New Jersey, John Wiley & Sons. Page 891-898.
- McGarvey, J.A., Miller, W.G., Sanchez, S., Silva, S.J. and Whitehand, L.C. (2005). Comparison of bacterial populations and chemical composition of dairy wastewater held in circulated and stagnant lagoons. *Journal of Applied Microbiology*. 99: 867-877.
- Minhee, L. and Minjune, Y. (2009). Rhizofiltration using sunflower (*Helianthus annuus L.*) and bean (*Phaseolus vulgaris L. var. vulgaris*) to remediate uranium contaminated groundwater. *J. Hazard. Mater.* 173(1):589-596.
- Mitchell, D.S., 1976. *The growth and management of Eichhornia crassipes and Salvinia spp. in their native environment and in alien situations*. In: Varshney, C.K. and Rzoska, J. *Aquatic Weeds in Southeast Asia*. Washington. The Hague. Page 396.
- Mishima, D., Kuniki, M., Sei, K., Soda, S., Ike, M. and Fujita, M. (2008). Ethanol production from candidate energy crops: Water hyacinth (*Eichhornia crassipes*) and water lettuce (*Pistia stratiotes L.*). *Bioresource Technology*. 99: 2495-2500.
- Mitchell, D.S. (1974) *Aquatic Vegetation and its Use and Control*. UNESCO, Paris.
- Mohagheghi, A., Dowe, N., Schell, D., Chou, Y., Eddy, C. and Zhang, M. (2004). Performance of a newly developed integrant of *Zymomonas mobilis* for ethanol production on corn stover hydrolysate. *Biotechnology Letters*. Volume 26(4). p. 321-235.

- Mohagheghi, A., Ruth, M. and Schell, D.J. (2006). Conditioning hemicellulose hydrolysates for fermentation: Effects of overliming pH on sugar and ethanol yields. *Process Biochemistry*. 41:1806–1811.
- Mohagheghi, A., Dowe, N., Schell, D., Chou, Y., Eddy, C., Zhang, M. (2004). Performance of a newly developed integrant of *Zymomonas mobilis* for ethanol production on corn stover hydrolysate. *Biotechnol Lett* 26:321–325.
- Mosier, N., Wyman, C. and Dale, B. (2005), Features of promising technologies for pretreatment of lignocellulosic biomass. *Bioresource Technology*. 96 (6): 673–686.
- Miller, R.R. (1996). Technology overview report: Phytoremediation. Ground-Water Remediation Technologies Analysis Center. Pittsburgh, PA., USA.
- Mulbry, W.W., Delvalle, L.P. and Karns, J.S. (1996). Biodegradation of the Organophosphate insecticide Coumaphos in Highly Contaminated Soils and In Liquid Wastes. *Pesticide Science*. Page 149-155.
- Narayana, J. and Parveez, S. (2000). Treatment Of Paper Mill Effluent Using water Hyacinth-*Eichhornia Crassipes*. *J. Indus. Poll.* 16 (2),161–164.
- Nigam, J.N. (2002). Bioconversion of water-hyacinth (*Eichhornia crassipes*) hemicellulose acid hydrolysate to motor fuel ethanol by xylose-fermenting yeast. *Biotechnology*. 97:107-116.
- Ndimele, P.E., Kumolu-Johnson, C.A. and Anetekhai, M.A. (2011). The Invasive Aquatic Macrophyte, Water Hyacinth [*Eichhornia crassipes* (Mart.) Solms-Laubach: Pontedericeae]: Problems and Prospects. *Research Journal of Environmental Sciences*, 5: 509-520.
- Ndimele, P.E. (2010). A Review on the Phytoremediation of Petroleum Hydrocarbon. *Pakistan Journal of Biological Sciences*. 13: 715-722.
- Ndimele, P.E. and Jimoh, A.A. (2011). Water Hyacinth (*Eichhornia crassipes* (Mart.) Solms.) in Phytoremediation of Heavy Metal Polluted Water of Ologe Lagoon, Lagos, Nigeria. *Res. J. of Environ. Sci.* 5: 424-433.
- Ndimele, P.E. (2012). The Effects of Water hyacinth (*Eichhornia crassipes* [Mart.] Solms) Infestation on the Physico-Chemistry, Nutrient and Heavy Metal Content of Badagry Creek and Ologe Lagoon, Lagos, Nigeria. *Journal of Environmental Science and Technology*. 5: 128-136.

- Parveen, K., Barrett, D. M., Delwiche, M. J. and Stroeve, P. (2009). Methods for Pretreatment of Lignocellulosic Biomass for Efficient Hydrolysis and Biofuel Production. *Industrial & Engineering Chemistry Research*. 48(8):3713–29.
- Polprasert, C. (2007). *Organic Waste Recycling, technology and management*. IWA Publishing, London.
- Praveena, P. and Naseema, A. (2004). Fungi occurring on water hyacinth [*Eichhornia crassipes* (Mart.) Solms] in Kerala. *Journal of Tropical Agriculture*. 42 (1-2): 21-23.
- Phillips, T.M., Seech, A.G., Trevors, J.T. and Piazza, M. (2000). Bioremediation of Soil Containing Hexachlorocyclohexane. Case Studies in the Remediation of Chlorinated and Recalcitrant Compounds, Wickramanayake, G.B., A.R. Gavaskar, J.T. Gibbs and J.L. Means (Eds.). *Battelle Press*, Columbus, OH., USA.
- Pradhan, S.P., Conrad, J.R., Paterek, J.R., Srivastava, V.J. (1998). Potential of phytoremediation for treatment of PAHs in soil at MGP sites. *J Soil Contamination*. 7(4): 467-480
- Pletsch, M., DeAraujo, B.S. and Charlwood, B.V. (1999). Novel biotechnological approaches in environmental remediation research. *Biotechnology Advances*. 17(8):679-687.
- Radhika, D. and Murugesan A.G. (2012). Bioproduction, statistical optimization and characterization of microbial plastic (poly 3-hydroxy butyrate) employing various hydrolysates of water hyacinth (*Eichhornia crassipes*) as sole carbon source. *Bioresource Technology*. 121, 83-92.
- Raskin, I., Nanda Kumar, P. B. A., Dushenkov, V. and Salt D. E. (1994). Bioconcentration of heavy metals by plants. *Curr. Op. Biol*. 5:285-290.
- Rock, S.A., Govindaswamy, S. and Schupp, D.A. (2011) Batch and continuous removal of arsenic using hyacinth roots. *Int. J. Phytoremediation*. 13(6):513-27.
- Rock, S.A. and Sayre, P.G. (1998). Phytoremediation of Hazardous Wastes: Potential Regulatory Acceptability. *Remediation*. 98; 5-17.

- Rajkumar, M. and Freitas, H. (2008). Effects of inoculation of plant-growth promoting bacteria on Ni uptake by Indian mustard. *Bioresour. Technol.* 99: 3491-3498.
- Ramey, V. (2001). *Water Lettuce (Pistia stratiotes)*. Center for Aquatic and Invasive Plants, University of Florida. <http://plants.ifas.ufl.edu/node/328>.
- Reddy, K.R. and Tucker, J.C. (1983). *Productivity and nutrient uptake of water hyacinth Eichhornia crassipes*. Effect of nitrogenous source. *Econ. Bot.* 37(2):237-247.
- Robert, J.N., Henri, D. and Michael, P. (1993). The Role of Riparian Corridors in Maintaining Regional Biodiversity. *Ecological Application*. Page 209-212.
- Roberts, D.J., Kaake, R.H., Funk, S.B., Crawford, D.L. and Crawford, R.L. (1993). Anaerobic remediation of dinoseb from contaminated soil: An on-site demonstration. *Applied Biochem. Biotechnol.* 39/40: 781-789.
- Rofkar, J.R. (2010). An ecologically engineered system for remediation of arsenic-contaminated water: Selecting plant species for Northwest Ohio. Ph.D. Thesis, University of Toledo, Toledo, Ohio.
- Reddy, K.R., and Sutton, D.L. (1984). Waterhyacinths for water quality improvement and biomass production. *Journal of Environmental Quality*. 13:1-8.
- Rugh, C.L., Senecoff, J.F., Meagher, R.B. and Merkle, S.A. (1998). Development of transgenic yellow poplar for mercury phytoremediation. *Nat. Biotechnol.* 16(10):925-928.
- Robinson, B.H., Chiarucci, A., Brooks, R.R., Petit, D., Kirkman, J.H., Gregg, P.E.H. and DeDominicis, V. (1997). The nickel hyperaccumulator plant *Alyssum Bertolonii* as a potential agent for phytoremediation and the phytomining of nickel. *J. Geochem. Explor.* 59: 75-86.
- Singh, O.V. and Jain, R.K. (2003). Phytoremediation of toxic aromatic pollutants from soil. *Appl Microbiol Biotechnol.* 63:128-135
- Sousa, L.D.C., Chundawat, S. P. S., Balan, V. and Dale, B.E. (2009). Cradle-to-grave' assessment of existing lignocellulose pretreatment technologies. *Environmental Biotechnology*. 20(3): 339-347.
- Sarkar, N., Ghosh, S.K., Bannerjee, S. and Aikat, K. (2012). Bioethanol production from agricultural wastes: an overview. *Renewable Energy*. 37(1): 19-27.

- Shi, J., Zhang, M., Zhang, L., Wang, P., Jiang, L. and Deng, H. (2014). Xylose-fermenting *Pichia stipitis* by genome shuffling for improved ethanol production. *Microb Biotechnol.* 7(2): 90–99.
- Sakadevan, K. and Bavor, H.J. (1998). Phosphate adsorption characteristics of soils, slags and zeolite to be used as substrates in constructed wetland systems. *Water Research.* 2, 393–399.
- Sánchez, E., Borja, R., Travieso, L., Martín, A. and Colmenarejo, M.F. (2005). Effect of organic loading rate on the stability, operational parameters and performance of a secondary upflow anaerobic sludge bed reactor treating piggery waste. *Bioresource Tech.* 96, 3: 335-344.
- Sarma, H. (2011). Metal Hyperaccumulation in Plants: A Review Focusing on Phytoremediation Technology. *J. Environ. Sci. Tech.* 4: 118-138.
- Salt, D.E., Benhamou, N., Leszczyniecka, M., Raskin, I. (1999). A possible role for rhizobacteria in water treatment by plant roots. *Int. J. Phytorem.* 1:67-79.
- Shimp, J.F., Tracy, J.C., Davis, L.C., Lee, E., Huang, W., Erickson, L.E. and Schnoor, J.L. (1993). Beneficial effects of plants in the remediation of soil and groundwater contaminated with organic materials. *Crit. Rev. Environ. Sci. Technol.* 23:41-77.
- Salt, D.E., Smith, R.D. and Raskin, I. (1998). Phytoremediation. *Annu. Rev. Plant Physiol.* 49: 643-668
- Schnoor, J.L. (1997). *Phytoremediation, Technology Overview Report*. Ground-Water Remediation Technologies Analysis Center. Vol. E(1).
- Sandermann, H. (1994). Higher plant metabolism of xenobiotics: the green liver concept. *Pharmacogenetics.* 4:225–241.
- Susarla, S., Medina, V.F. and McCutcheon, S.C. (2002). Phytoremediation: An ecological solution to organic chemical contamination. *Ecol. Eng.* 18: 647-658
- Soudek, P., Petrová, S., Benesová, D., Dvůráková, M. and Vanek, T. (2011). Uranium uptake by hydroponically cultivated crop plants. *J. Environ. Radioactivity.* 102, 598-604.

- Singhal, V. and Rai, J.P.N. (2002). Biogas Production From Water Hyacinth And Channel Grass Used For Phytoremediation Of Industrial Effluents. University of Agriculture and Technology, Pantnagar, India.
- Sumner, J.B. and Graham, V.A. (1921). Dinitrosalicylic Acid: A Reagent For The Estimation Of Sugar In Normal And Diabetic Urine. *J. of Biological Chemistry*. 47: 5-9.
- Sipaúba-Tavares, L.H. and Braga, FMS. (2007). The Feeding Activity of *Colossoma Macropomum* larvae (Tambaqui) on Fishponds with Water Hyacinth (*Eichhornia Crassipes*) Fertilizer. *Braz. J. Biol.* 67: 3.
- Showers, D.R., Norris, R.D. and Clarke, A.N. (1996). Treatability studies for pesticides contaminated soil from a superfund site: A case study of six technologies. Proceedings of the 89th Annual Meeting Air and Waste Management Association, June 23-28, 1996, Nashville, TN., USA.
- Singhvi, R., Koustas, R.N. and Mohn, M. (1994). Contaminants and remediation options at pesticide sites. *EPA/600/R-94/202*.
- Schmidt, U. (2003). "Enhancing Phytoextraction: The Effect of Chemical Soil Manipulation on Mobility, Plant Accumulation, and Leaching of Heavy Metals". *J. Environ. Qual.* 32 (6): 1939–54.
- Sun, Y. and Cheng, J.Y. (2002), Hydrolysis of lignocellulosic materials for ethanol production: a review. *Bioresource Technology*. 83 (1): 1–11.
- Thomas, D. W. (1984). Principles of Water Quality. Water Resources and Water Quality Management. Academic Press. Page 107-119
- Thomas, C., Butler, A., Larson, S., Medina, V. and Begonia, M. (2011). Complexation of Lead by Bermuda Grass Root Exudates in Aqueous Media. *Int. J. Phytoremediation*. 16(6):634-40.
- Tomas-Pejo, E., Oliva, JM., Ballesteros, M. and Olsson, L. (2008). Comparison of SHF and SSF processes from steam-exploded wheat straw for ethanol production by xylose fermenting and robust glucose-fermenting *Saccharomyces cerevisiae* strains. *Biotechnology and Bioengineering*. 100(6):1122-1131.
- Terry, N., Carlson, C., Raab, T. K. and Zayed, A. M. (1992). Rates of selenium volatilization among crop species. *J. Environ. Qual.* 21: 341-344.
- Tchobanoglous, G., Stowell, R., and Ludwig, R. (1979). Aquatic System for waste water treatment - Seminar Proceedings and Engineering Assessment,

- pp.35-55. Report No. EPA 430/9-80-006. U.S. Environmental Protection Agency, Washington D.C.
- Tsuji, M. (2002). SeO_3^{2-} selective properties of inorganic materials synthesized by the soft chemical process. *Solid State Ionics*. 151, 385–392.
- U.S. EPA. 1997. *Status of in situ phytoremediation technology: In Recent developments for in situ treatment of metal contaminated soils*. EPA-542-R-97-004. Page 31-42.
- U.S. EPA. 2000. *Introduction to Phytoremediation*. EPA/600/R-99/107.
- Veselý, T., Tlustos, P. and Száková, J.. (2011). The Use of Water Lettuce For Rhizofiltration Of A Highly Polluted Solution By Cadmium And Lead. Czech University of Life Sciences Prague, Kamýcká, Prague, Czech Republic.
- Weber, A.S. and Tchobanoglous, G. (1985). Rational Design parameters for ammonia conversion in water hyacinth treatment systems. *J. Water Pollut. Control Fed.* 57: 316-323.
- William T. P. and David L. C. (1984). Nutrient Dynamics in an Agricultural Watershed: Observations on the Role of A Riparian Forest. *Ecology*. 65:1466–1475.
- Williams, J.B. (2002). Phytoremediation in Wetland Ecosystems: Progress, Problems, and Potential. *Plant Sciences*. 21, 6:607-635.
- Witters, N., Mendelsohn, R.O., Van Slycken, S., Weyens, N., Schreurs, E., Meers, E., Tack, F., Carleer, R. and Vangronsveld, J. (2012). Phytoremediation, a sustainable remediation technology? Conclusions from a case study. I: Energy production and carbon dioxide abatement. *Biomass and Bioenergy*. 39, 454-469.
- Wooley, R., Ruth, M., Glassner, D. and Sheehan, J. (1999). Process design and costing of bioethanol technology: A tool for determining the status and direction of research and development. *Biotechnol Progr.* 15:803.
- Wu, C.H., Wood, T.K., Mulchandani, A. and Chen, W. (2006). Engineering plant– microbe symbiosis for rhizoremediation of heavy metals. *Applied Environ. Microbiol.* 72:1129-1134.
- Wyman, C.E., Dale, B.E. and Elander, R.T. (2005), Coordinated development of leading biomass pretreatment technologies. *Bioresource Technology*. 96 (18):1959–1966.

- Yang, U.J., Yoon, S. R., Chung, J. H., Kim, Y. J., Park, K.H., Park, T.S. and Shim, S.M. (2012). Water Spinach Reduced The Absorption Of Heavy Metals In An In Vitro Bio-Mimicking Model System. *Food And Chem Toxicology*. 50(10):3862-6.
- Yang, B. and Wyman, C.E. (2007), Pretreatment: the key to unlocking low-cost cellulosic ethanol. *Biofuels, Bioproducts and Biorefining*. 2 (1): 26–40.
- Yanai, R.D. (1994). Steady-state model of nutrient uptake accounting for newly grown roots. *Soil Sci. Soc. Am. J.* 58, 1562-1571
- Yateem A, El-Nawawy, E.S., Al-Awadhi, N. (1999). *Soil and Groundwater Cleanup*. Page 31-33.
- Zhang, B.Y., Zheng, J.S. and Sharp, R.G. (2010). Phytoremediation in engineered wetlands: Mechanism and applications. *Proced. Environ. Sci.* 2:1315-1325.
- Zhang, X.B., Liu, P., Yang, Y.S. and Chen, W.R. (2007). Phytoremediation of urban wastewater by model wetlands with ornamental hydrophytes. *J. of Environ. Sci.* 19(8): 902-909.